






OR600ERM1U-AU/OR1000ERM1U-AU  
OR1500ERM1U-AU

### RELIABLE UPS TO PROTECT OFFICE EQUIPMENT



#### The line-interactive UPS with energy-saving technology for IT devices


Designed for office and server room applications, the Office Rackmount Series is a reliable UPS which adopts line-interactive topology with Automatic Voltage Regulation (AVR) function to offer stabilised AC power output. It features Simulated Sine Wave output, and hot-swappable battery packs for simple maintenance. The power management software can also easily control and monitor the UPS system.

#### SERIES FEATURES

- Line-interactive UPS Topology
- Energy Saving Technology
- Simulated Sine Wave Output
- Automatic Voltage Regulation (AVR)
- Overload Protection
- Hot-swappable Batteries
- Surge and Spike Protection
- EMI and RFI Filtration
- Phone/Fax/Modem/DSL/Network Protection
- LCD Status Display
- USB Connectivity Port
- PowerPanel Management Software
- SNMP/HTTP Remote Management Capability (Optional)

#### PRODUCT CALLOUTS

1. Power On Indicator
2. Power On/Off Switch
3. LCD Display Panel
4. Function Button(s)
5. Battery Backup & Surge Protected Outlets
6. Surge Protected Outlets
7. Communication Protection Ports RJ45
8. Input Circuit Breaker
9. AC Inlet
10. Serial Port
11. USB Port
12. SNMP/HTTP Network Slot

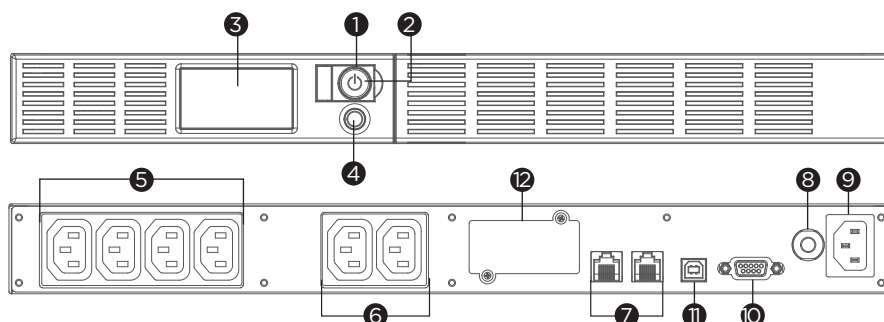

OR600/1000/1500ERM1U-AU



## TECHNICAL SPECIFICATIONS

Model Name	OR600ERM1U-AU	OR1000ERM1U-AU	OR1500ERM1U-AU
<b>General</b>			
UPS Topology	Line-interactive		
Energy Saving Technology	GreenPower UPS™ Bypass Technology		
<b>Input</b>			
Nominal Input Voltage (Vac)	230		
Input Voltage Range (Vac)	165 - 271		
Input Frequency (Hz)	50 ± 3, 60 ± 3		
Input Frequency Detection	Auto-sensing		
Rated Input Current (A)	10		
Input Connector Type	IEC C14		
<b>Output</b>			
Capacity (VA)	600	1000	1500
Capacity (Watts)	360	600	900
On Battery Waveform	Simulated Sine Wave		
On Battery Voltage(s) (Vac)	230 ± 10%		
On Battery Frequency (Hz)	50 ± 1%, 60 ± 1%		
Power Factor	0.6		
Automatic Voltage Regulation (AVR)	Single Boost		
Overload Protection	Internal Current Limiting, Circuit Breaker		
Outlet(s) - Total	6		
Outlet Type	IEC C13 x 6		
Outlet(s) - Battery & Surge Protected	4		
Outlet(s) - Surge-Only Protected	2		
Typical Transfer Time (ms)	4		
<b>Battery</b>			
Runtime at Half Load (min)	13	14	11
Runtime at Full Load (min)	4	3.5	2.5
Typical Recharge Time (Hours)	8		
User-replaceable	Yes		
Hot-swappable	Yes		
Battery Type	Sealed Lead-acid		
Replacement Battery Pack (RBP)	RBP0019	RBP0025	RBP0026
Replacement Battery Pack (RBP) Quantity (pcs)	1		
<b>Surge Protection &amp; Filtering</b>			
Surge Suppression (Joules)	405	810	
EMI/RFI Filtration	Yes		
Phone/Network Protection RJ11/RJ45 (Combo)	1-in, 1-out		
<b>Management &amp; Communications</b>			
LCD Panel	Yes		
HID Compliant USB Port(s)	1		
Serial Port	Dry Contact		
Power Management Software	PowerPanel Business (Recommended)		
SNMP/HTTP Remote Monitoring	Yes - with optional RMCARD205		
<b>Physical</b>			
Form Factor	Rackmount		
<b>Physical Size - UPS Module</b>			
Dimensions (WxHxD) (mm.)	433 x 44 x 235	433 x 44 x 389	
Weight (kg.)	7.8	13.7	14.9
Installed Rack Height (U)	1		
<b>Environmental</b>			
Operating Temperature (°C)	0 - 40		
Operating Relative Humidity (Non-condensing) (%)	0 - 95		
Online Thermal Dissipation (BTU/hr)	20	24	
<b>Certifications</b>			
Certifications*	CE, EAC, RCM		
RoHS	Yes		

\*Certifications may vary according to different regions. Visit [www.cyberpower.com](http://www.cyberpower.com) for more information.  
#All specifications are subject to change without notice.